

C-T4 / C-T4BT

ATMOSPHERE WALL CONTROLLER

TECHNICAL DATA SHEET



PRODUCT SUMMARY

The AtlasIED Atmosphere C-T4 series wall controllers bring advanced functionality and intuitive design to the Atmosphere audio control system. Featuring a 4.3-inch programmable touchscreen, capacitive touch volume slider, and customizable action buttons, these controllers make managing zones, sources, and system actions effortless.

Built with a PIR motion sensor, the C-T4 series adds intelligent automation by triggering system behavior based on room occupancy. Designed for seamless plug-and-play integration, the C-T4 series controllers connect directly to Atmosphere AZM head-end processors via CAT5e cabling and support daisy-chaining over distances of up to 1,000 feet, ensuring flexible installation options. With a sleek 2-gang design, the C-T4 series fits into standard wall boxes and is available in four variants to meet aesthetic and functional preferences, including options for Bluetooth audio and color finishes in black or white. Ideal for commercial spaces, the C-T4 series combines innovative control features with elegant design to elevate any audio environment.

For information regarding product installation, see the [C-T4 Installation Guide](#).

FEATURES

- **4.3" Programmable Touchscreen:** Customizable interface for streamlined control of zones, sources, and actions.
- **Capacitive Touch Volume Slider:** Smooth, intuitive volume adjustment for precise audio control.
- **Programmable Action Buttons:** Quick-access buttons for easy execution of preset commands or configurations.
- **PIR Motion Sensor:** Automatically trigger actions or behaviors on the AZM processor based on motion detection.
- **Automatic LCD Brightness:** Adjust LCD brightness automatically based on ambient lighting conditions.
- **Plug-and-Play Integration:** Effortlessly connects to Atmosphere AZM head-end processors for seamless system operation.
- **Daisy-Chain Connectivity:** Supports up to 1,000 feet of daisy-chaining for flexible installation across larger spaces.
- **Multiple Variants:**
 - C-T4: White
 - C-T4-B: Black
 - C-T4BT: White, includes Bluetooth audio
 - C-T4BT-B: Black, includes Bluetooth audio
- **Standard 2-Gang Design:** Easy to install in a wide variety of commercial environments.

APPLICATIONS

- Restaurant / Bar
- Hospitality / Hotels
- House of Worship
- Offices
- Education
- Corporate Centers

C-T4 / C-T4BT

ATMOSPHERE WALL CONTROLLER

TECHNICAL DATA SHEET



TECHNICAL SPECIFICATIONS

C-T4BT (BLUETOOTH MODEL)	
Bluetooth Standard	V4.2
Audio Profile	A2DP
Open Air Range	Up to 100ft
Output Type	Stereo (default) or Mono, configurable in AZM web GUI
LED Indicator	Green: Paired Red: Error Blue (pulsing): Pairing mode Blue (blinking): Locating mode Yellow: Firmware updating
Buttons	2x Programmable buttons (A, B) 1x Bluetooth button
Dimensions (Height x Width x Depth)	5.3" x 5.5" x 1.4" (136mm x 141mm x 36mm)
C-T4BT Minimum Box Depth	1.8" (46mm)
Volume Slider	Capacitive Touch Slider
Motion Sensor Type	PIR
Motion Sensor Range	Up to 30ft
Ambient Light Sensor	Yes, automatic LCD/LED brightness
Custom Bluetooth Name	Yes, definable in AZM web GUI
Color Options	White / Black
Compatibility	Compatible with all Atmosphere AZM / AZMP system processor running software v4.5 or greater
C-T4 (NON-BLUETOOTH MODEL)	
Indicator	Red: Error Blue (blinking): Locating mode Yellow: Firmware updating
Button	3x Programmable buttons (A, B, C)
Dimensions (Height x Width x Depth)	5.3" x 5.5" x 1.4" (136mm x 141mm x 36mm)
C-T4 Minimum Box Depth	1.8" (46mm)
Volume Slider	Capacitive Touch Slider
Motion Sensor Type	PIR
Motion Sensor Range	Up to 30ft
Ambient Light Sensor	Yes, automatic LCD/LED brightness
Color Options	White / Black
Compatibility	Compatible with all Atmosphere AZM / AZMP system processor running software v4.5 or greater

C-T4 / C-T4BT


ATMOSPHERE WALL CONTROLLER

TECHNICAL DATA SHEET



DIMENSIONAL DRAWINGS

ITEM	QUANTITY
Height	5.3" (136mm)
Width	5.5" (141mm)
Depth	1.4" (36mm)
Depth From Surface (max)	0.8" (20mm)
Depth From Surface (LCD)	0.6" (15mm)
Mounting Depth	0.7" (17mm)
Mounting Cavity Width	3.7" (94mm)
Mounting Cavity Height	2.7" (68mm)
Mounting Cavity Depth	0.3" (8mm)

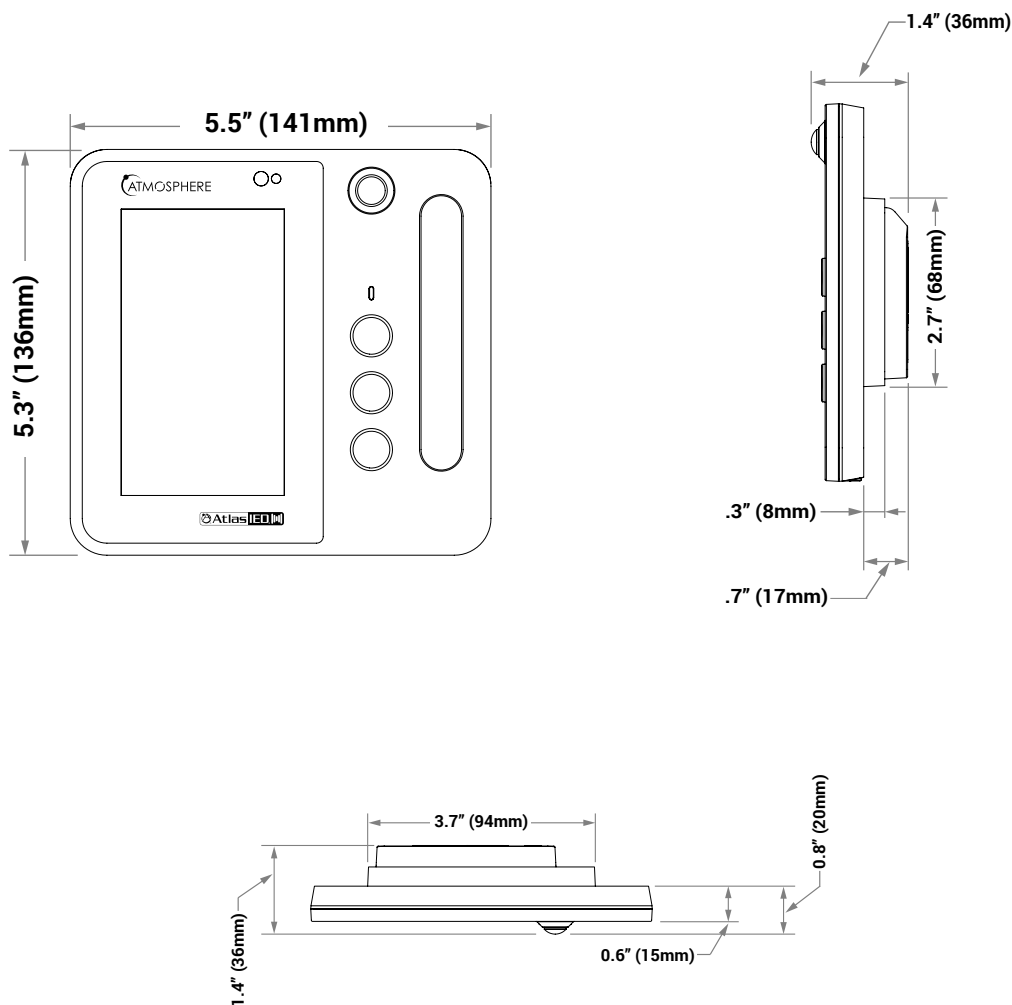

C-T4 / C-T4BT

ATMOSPHERE WALL CONTROLLER



TECHNICAL DATA SHEET

COMPATIBILITY AND USAGE

Each Atmosphere Accessory Port can accommodate a single audio accessory and a varying amount of control accessories, limited by the number of “slots” they consume on a port. Each port allows for a maximum of 8 slots.

Both the C-T4 and C-T4BT consume 2 of the 8 slots per accessory port. Additionally, the C-T4BT is an audio device and occupies the sole audio slot per accessory port.

MODEL	DESCRIPTION	#POWER SLOTS	AUDIO SLOTS?
C-T4BT	Multi-zone touch controller w/Bluetooth audio	2	Yes
C-T4	Multi-zone touch controller	2	No
C-V	Volume controller	1	No
C-ZSV	Multi-zone controller	1	No
X-ZPS	Paging station	3	Yes
A-RCA	RCA audio input	1	Yes
A-XLR	XLR audio input	1	Yes
A-BT	Bluetooth audio input	1	Yes
X-ANS	Ambient Noise Sensor	1	No

C-T4 / C-T4BT



ATMOSPHERE WALL CONTROLLER

TECHNICAL DATA SHEET



ATMOSPHERE ACCESSORY PORT LIMITATIONS

- Up to 16 accessories per AZM / AZMP.
- Up to 8 devices per port (8 slots) in daisy-chain configuration.
- A single (1) audio input per accessory port (A-RCA, A-XLR, A-BT, X-ZPS, C-T4BT).
- Up to 8 ANS sensors per AZM / AZMP across all ports.
- Total daisy-chain length up to 1000 feet.

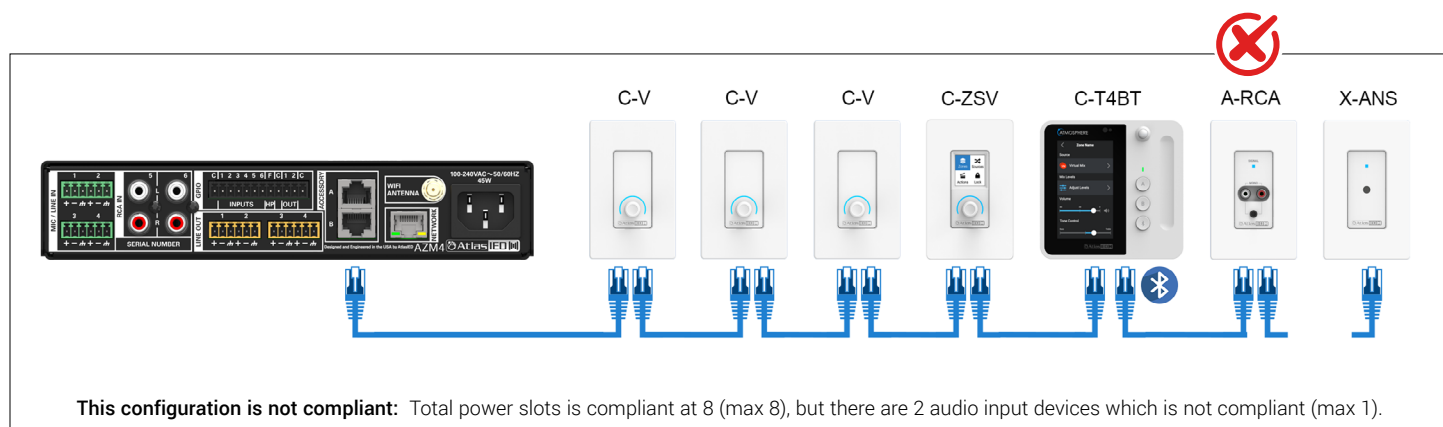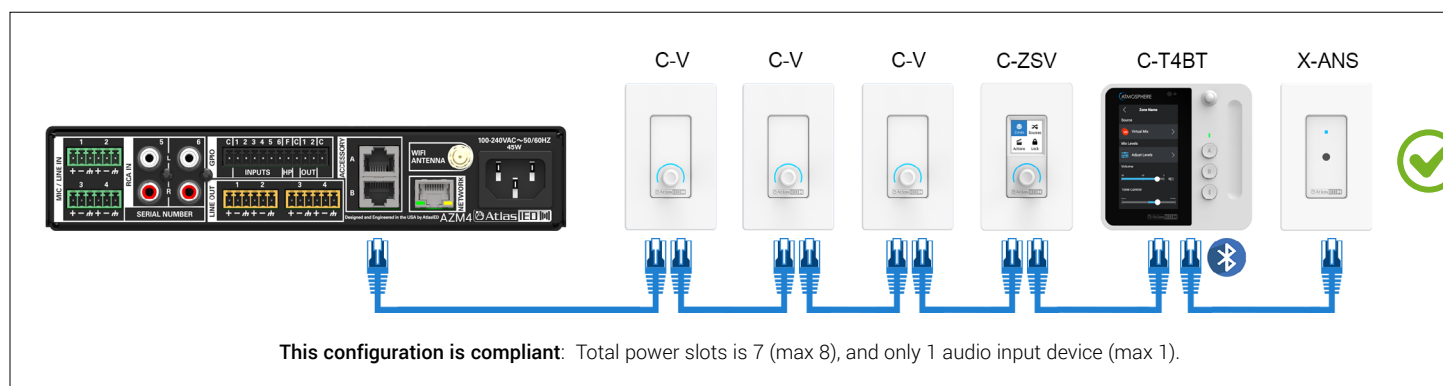

C-T4 / C-T4BT


ATMOSPHERE WALL CONTROLLER

TECHNICAL DATA SHEET



PACKAGE CONTAINS

ITEM		QUANTITY
A	C-T4 / C-T4BT touchscreen wall controller	1
B	Mounting bracket, 2-gang	1
C	Imperial mounting screw, 6-32, silver, (typical US)	4
D	Imperial mounting screw, 8-32, black	4
E	Metric mounting screw, M3, black	2
F	Metric mounting screw, M3.5, silver	2
G	Mounting bracket set screw	2
H	Microfiber cleaning cloth	1

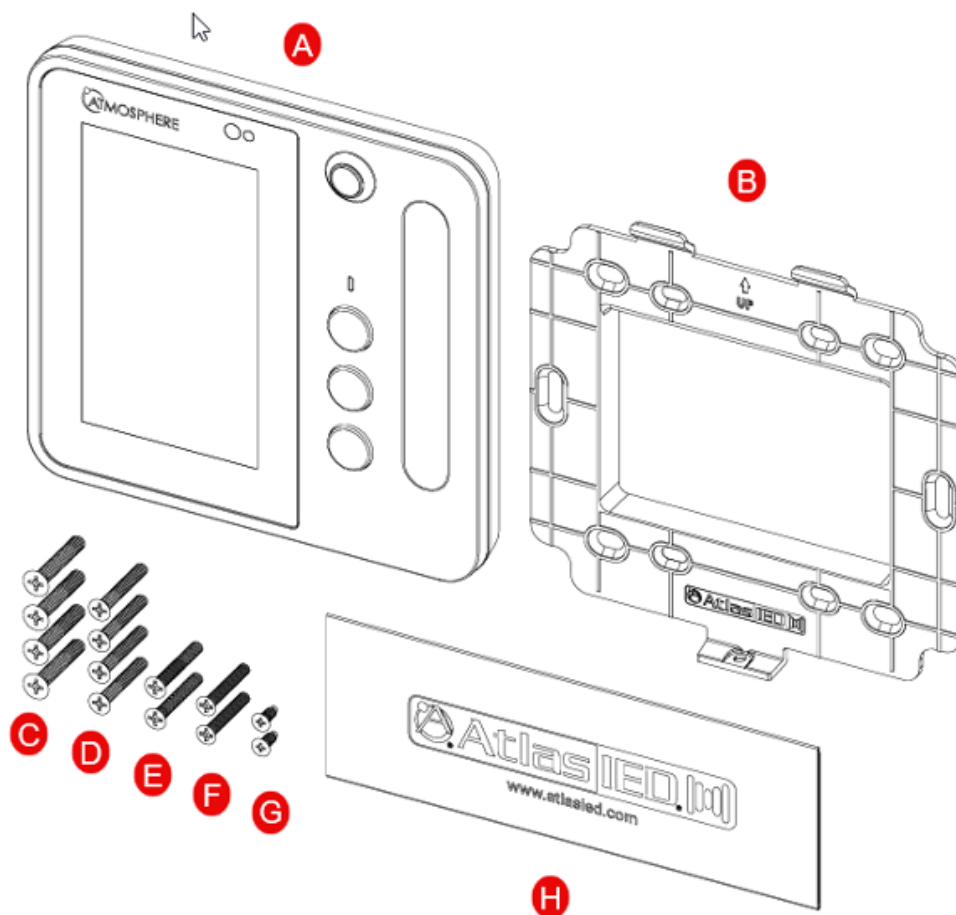

C-T4 / C-T4BT

ATMOSPHERE WALL CONTROLLER



TECHNICAL DATA SHEET

ARCHITECT & ENGINEER SPECIFICATIONS

The wall controller shall feature a 4.3-inch programmable capacitive touchscreen display for configuring zones, sources, and recalling system actions. The device shall include a capacitive touch volume slider for precise adjustment of audio levels. Programmable action buttons shall allow for customization to suit specific system requirements.

The wall controller shall incorporate a PIR motion sensor capable of triggering actions or behaviors on the Atmosphere AZM / AZMP head-end processor based on occupancy detection up to 30ft. Devices shall connect directly to Atmosphere AZM / AZMP head-end processors via a standard CAT5e cabling or better and support daisy-chaining over lengths of up to 1,000 feet.

Four model variants shall be available, differentiated by color and Bluetooth audio functionality: C-T4 (white, no Bluetooth), C-T4BT (white, with Bluetooth), C-T4-B (black, no Bluetooth), and C-T4BT-B (black, with Bluetooth).

The device shall be compatible with standard commercial installation practices, and all connectivity shall be plug-and-play, requiring no additional external power supplies.